



CXP-PELEADOR



English



BE A GAME CHANGER
ICS AIRSOFT

M-LOK

Having vibration test, mass shooting test, dropping test, forced pulling test and many types of test, Magpul developed and enhance the M-LOK system to increase the practicability.


The T-nuts can be fully fixed, the position can be slightly adjusted to increase the security of the tactical gears and convenience.

ICS has officially acquired the license from Magpul to use M-LOK framework to provide more reliable product to the future airsoft market.

Lightweight M-LOK Handguard

Industrial Nylon Fiber reinforced structure, eliminating tooling lines by special tooling techniques, having the metallic milling surface, adapting the fashion design, enhancing the product quality.



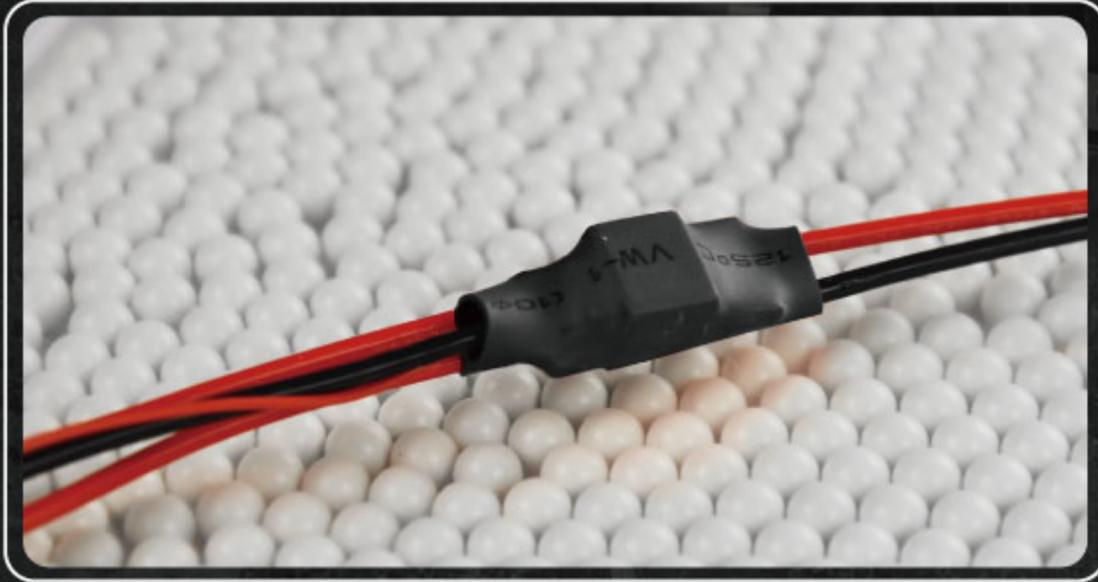

MOSFET System

Equipping the MOSFET to protect the traditional switch unit to reduce the electric resistance and extend the service lifetime of the rifle.

ICS Exclusive Split Gearbox

Separating upper and lower receivers by pulling two receiver pins. The operation is the same as the real firearm to have the advantage of convenient maintenance and easy upgrade.





Pressing Forward Assist Knob to Release Spring Tension

Releasing the spring tension by pressing forward assist knob to avoid spring elastic fatigue.

CFS Folding Sights

The CFS sights are entirely constructed of high-strength nylon fiber reinforced polymer, offer easy tool-less elevation and windage adjustment, and the spring-loaded sight post provides immediate deployment and collapse with a solid feel. (Compatible with M1913 Pictatinny mounting rail)



T-Mag

The innovative 300-round high capacity magazine with ammunition viewing window provides players with the maximum control on their firepower.

Battery Stock Tube

The stock tube design incorporates the cable hidden into the lower section of the tube.
Replacing batteries by simply removing the stock.



MTR Stock

The MTR stock is comfortable and ergonomic.
It is lightweight and adaptable with a Quick-Detach ring that allows other gear to be equipped.



▶ ICS-440
CXP-Peleador Sportline



▶ ICS-441
CXP-Peleador C Sportline

▶ IMT-440-1
CXP-Peleador Sportline - Tan



▶ IMT-441-1
CXP-Peleador C Sportline - Tan



BE A GAME CHANGER

ICS AIRSOFT

WWW.ICSB.COM



ICSCXP

CXP-PELEADOR

SERIES

CXP-Peleanor Specifications	CXP-Peleanor Sportline ● ICS-440 ● IMT-440-1	CXP-Peleanor C Sportline ● ICS-441 ● IMT-441-1
Length	817-894mm	717-794mm
Barrel length	375mm	303mm
Muzzle Velocity	100 m/s (330 FPS)	100 m/s (330 FPS)
Weight	2369 g	2333 g
Battery Type	7.4V Li-Po	7.4V Li-Po
Mag. Capacity	300 rounds	300 rounds
Spring	M100	M100
Material	Engineering plastic	Engineering plastic
Motor axle	Long	Long

NOTE:

1. The product specification is for reference only and may be subject to change.
2. Battery type is recommended, not included.
3. For AEG with M100 spring, it is recommended to use voltage 7.4V Li-Po or 9.6V Ni-Mh batteries.
4. Muzzle velocity is measured with 0.20g BB's, and is adjusted to comply with market regulation/requirements for specific countries as shown below:
 Below 106 m/s (350 FPS): Belgium, France, Netherlands, Portugal, Spain, UK
 Below 100 m/s (328 FPS): Italy
 Below 95 m/s (312 FPS): Japan
 Below 45 m/s (148 FPS): Korea



BE A GAME CHANGER

ICSAIRSOFT

WWW.ICSB.COM



ICSCXP

CXP-PELEADOR
SERIES